

Recessed mounting plate RA

If a lift is installed behind a suspended the recessed ceiling cover can be used to conceal the hole cut-out, lift and wiring.

It is fitted with four springs which can be adjusted to ensure that the plate fits snug to the ceiling while allowing the lifts locking mechanism to function correctly.

Recessed mounting plate RA-MES up to 50kg, plate for mounting to eyebolt, 400mm Ø x 5mm, White, RAL 9010.

Recessed mounting plate RA-MSS up to 50kg, mounting pattern 65 x 65 mm, 400mm Ø x 54mm, White, RAL 9010.


Recessed mounting plate RA-D for Super Heavy Duty Lifts, plate for mounting to eyebolt, 500mm Ø x 55mm, White, RAL 9010.



RA-MES



RA-MSS

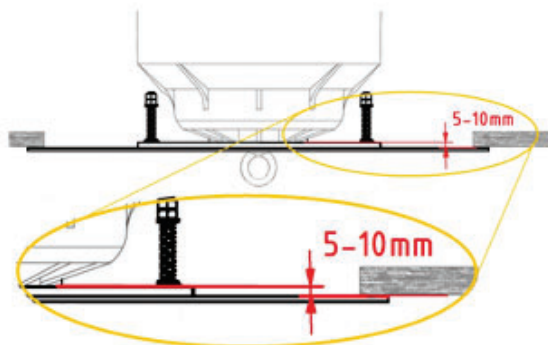

To allow the cover to operate correctly the distance between the underside of the ceiling and the lift coupler must be set correctly. Precise adjustment can be made by using the MB-V variable mounting bracket.




LSI-10L with recessed mounting plate RA-MSS



LSI-10C with socket connection



Lift in lowered state

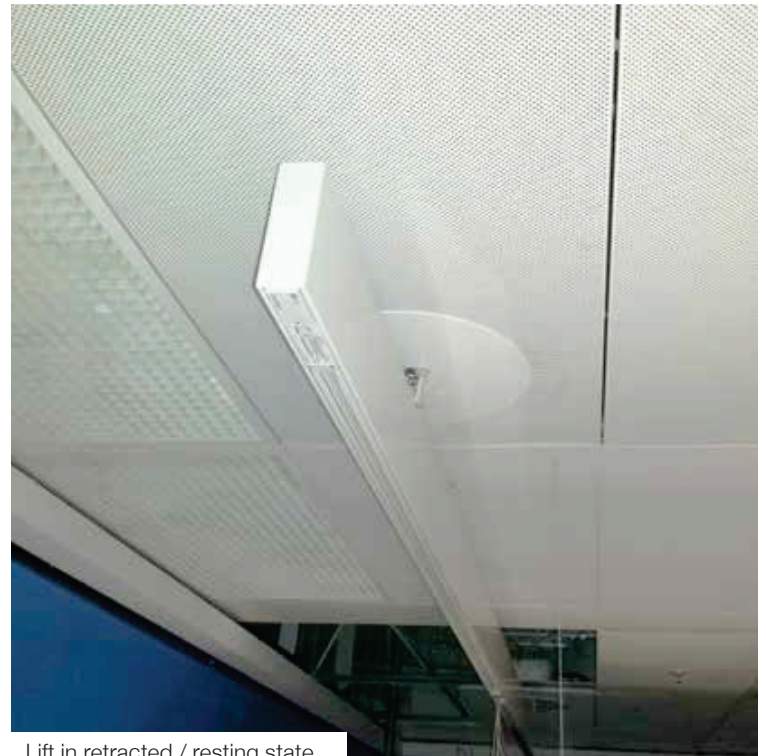

Lift in retracted / resting state



3x PDI-50 with recessed mounting plate RA-MES

Application
examples