



Sensor-Lift for low voltages

For signalling systems, sensors, audio or MSR applications that require more than 2 signal lines with low voltage, the multi-contact lifts with 8-pole through-connection are suitable. Power is supplied via the existing mains voltage, control via the built-in radio receiver.

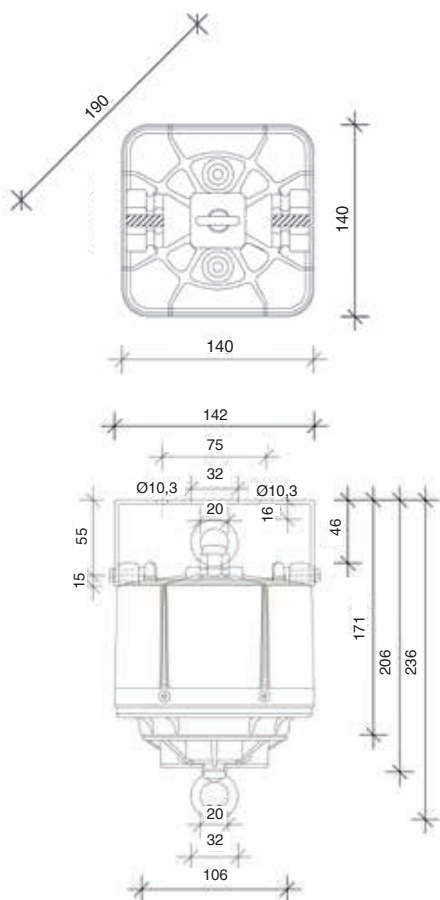

Dimensions:
CSI-12 M8c

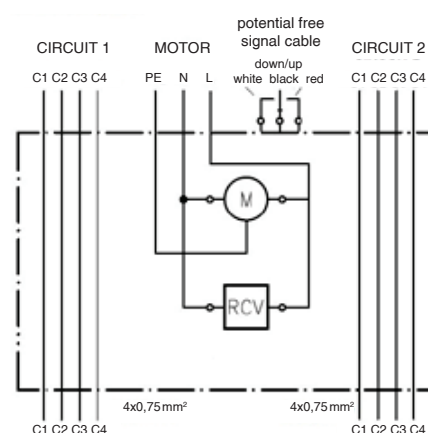

Sensor-Lift	CSI-12 M8c
Lifting capacity	3-7 kg
Lowering distance	15 m
Suspension cable	single
Power supply motor	100-277 V AC / 50-60 Hz; 30W
Auxiliary contacts / capacity	8/6A, 42V (230V) AC
Protection category / class	IP 54/I
Temperature range	-15 °C to + 60 °C
Net weight / with packaging	3,5 / 3,9 kg